




ROCOSA®

GRUPO INDUSTRIAL, S.A. DE C.V.

Components For:

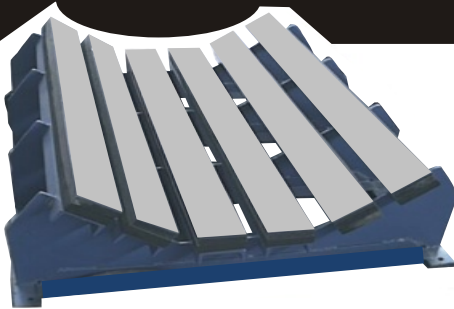





Belt Conveyors

Construction & Mining Industries



Belt Conveyor Components

We also offer a variety of idlers, manufactured in series with the finest materials, which include the regular 3-roll with 35° & 20° inclination, impact idlers, and aligning idlers, and return rollers, for standard band widths: 18", 24", 30", 36", 42" and 48". With can offer 4.5" and 5" diameter, completely sealed, rolls.

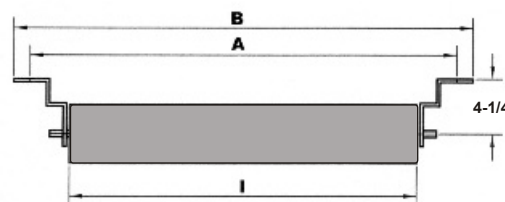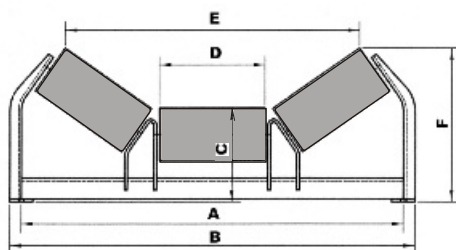

IDLERS 20°



RETURN ROLLERS

**** C E M A "C"**

***SPECIFICATIONS TABLE FOR 20° IDLERS
(DIMENSIONS IN INCHES)**

BELT WIDTH	A	B	C	D	E	F	H	I
18	27	29-1/2	7-3/4	6-13/16	20-3/4	10-1/8	4	21
24	33	35-1/2	7-3/4	8-15/16	26-7/8	11-1/8	4	27
30	39	41-1/2	7-3/4	10-15/16	32-5/8	11-1/2	4	33
36	45	47-1/2	7-3/4	12-15/16	38-3/8	12-1/4	4	39
42	51	53-1/2	7-3/4	15-1/4	45	13	4	45
48	57	59-1/2	7-3/4	17-1/4	50-3/4	13-3/4	4	51

*SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PREVIOUS NOTICE.

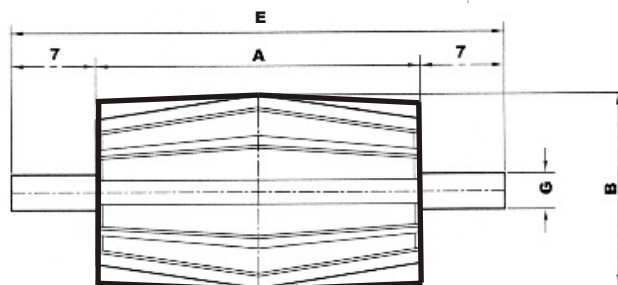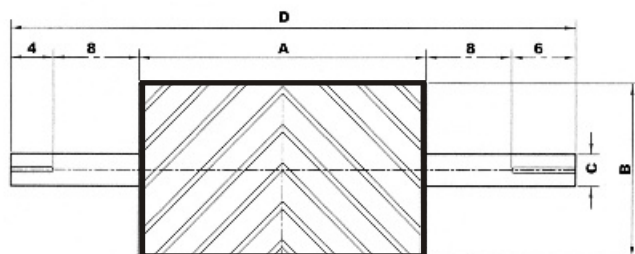

HEAD PULLEY

**** C E M A "C"**

TAIL PULLEY

***SPECIFICATIONS TABLE (DIMENSIONS IN INCHES)**

BELT WIDTH	18	24	30	36	42	48
A	21	27	33	39	45	51
B	12-3/4	16	20	20	24	28
C	2-7/16	2-15/16	3-7/16	3-15/16	4-7/16	4-15/16
D	47	53	59	65	71	77
E	35	41	47	53	59	65
G	2-7/16	2-7/16	2-15/16	2-15/16	2-15/16	2-15/16

* Specifications subject to change without prior notice.

** All manufacturing specifications for rollers and pulleys are in accordance with the standards of the International Standard CEMA.



HEADQUARTERS

Bld. Luis Donaldo Colosio Km. 4, Santa Catarina, Nuevo León; México
C.P. 66350 Phones. 52 (81) 8316-5442 / 52 (81) 8316-5287 / FAX.- 52 (81) 8316-4285
e-mail: ventas@rocosa.com